

Technical data sheet

I/O Box MPX

The I/O box is the interface between the MPX dosing station and the washing machines.

The I/O box transmits the control signals of the washing machine as digital data to the MPX dosing station.



Electrical data

Supply voltage:	24 V DC
Input power:	5 VA
Control input voltage:	12 ... 240 V AC/DC
Signal detection time:	< 500ms
Signal acceptance time:	can be set in SSC software
Voltage output for NO contact:	24 V DC (max. 20 mA)
Protection class:	IP 65


Mechanical data

Dimensions:	203 x 151 x 56 mm
Weight:	550 g

Ambient conditions

Ambient temperature range:	0 ... +45 °C
Environmental stress:	Conforms to DIN EN 60068-2-38

Dimensions

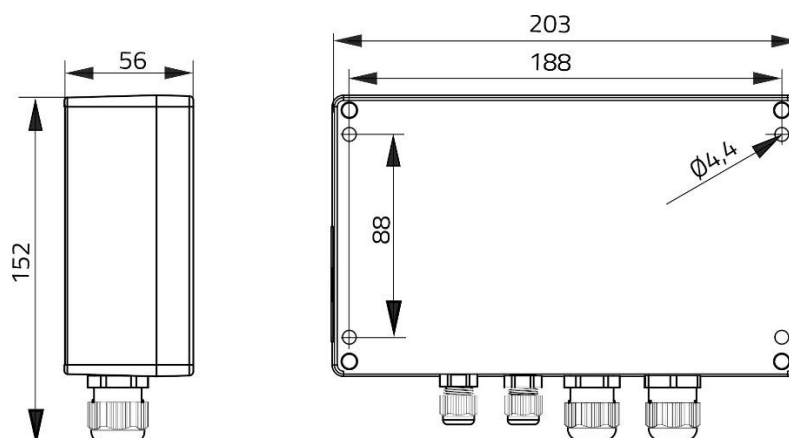

Product

Art. no:	Name
1005106	I/O Box MPX V3